

RM-418

19" Rackmount Chassis 4U



FEATURES:

- For main board of single board 14 full size or half size or ATX 12"x13" or 12"x9.6" or Micro ATX 9.6"x9.6" or Mini-ITX 6.6"x6.6"
- Industrial Standard 19" 4U metal chassis
- Four Bays 5.25"
- One Hot-Swappable 12cm cooling fan in front
- Removable/washable cooling fan filter
- Lockable access door
- Adjustable hold-down clamps

SPECIFICATION:

- Drive Bays:
 - ⊗ 4 x 5.25" open
- 2 Port USB connector
- Power and reset switches
- Air-flow volume: 2.4 CBM/min.
- Operation temperature range: 0 ~ 55°C
- Power supply (Options):
 - ⊗ PS/2 power supply 300W/400W/500W~1000W
 - ⊗ Mini redundant power supply 300W/400W/500W
- Dimensions: 16.8" x 20" x 6.97" (W x D x H)




RM-418 Front – Open



RM-418 Front – Inside




RM-418 Rear

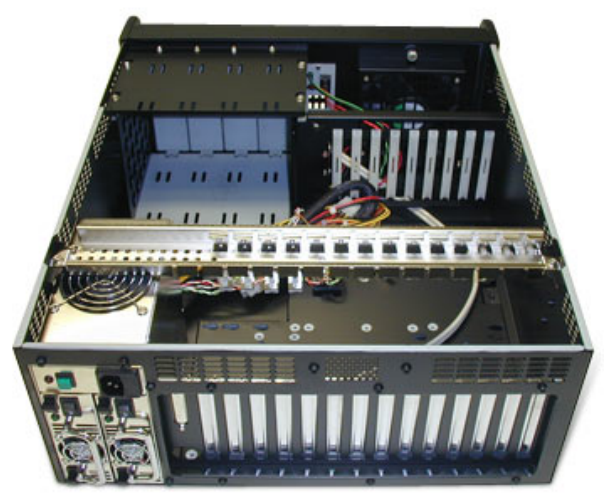






RM-418 Rear – Inside




RM-418 Side

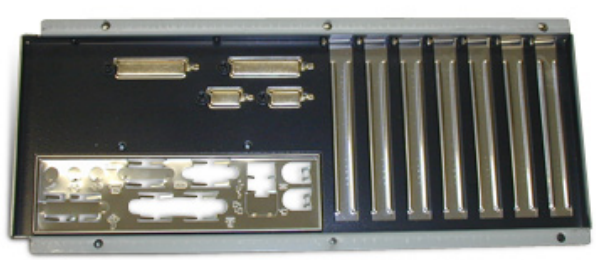

Optional : ATX Rear Window for RM-418

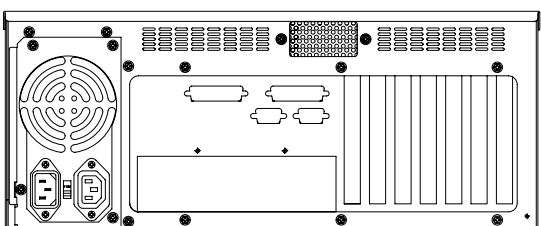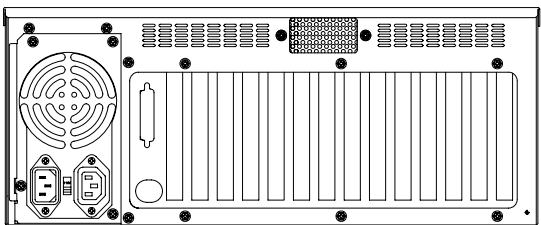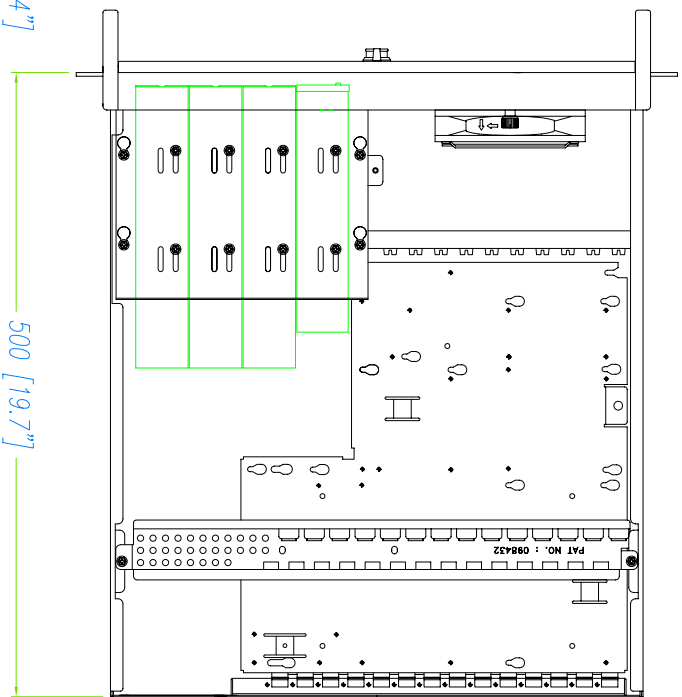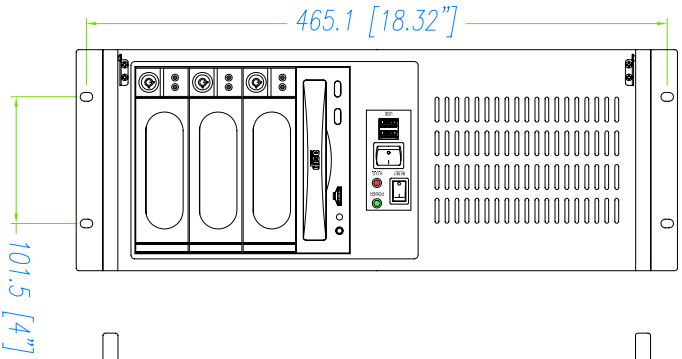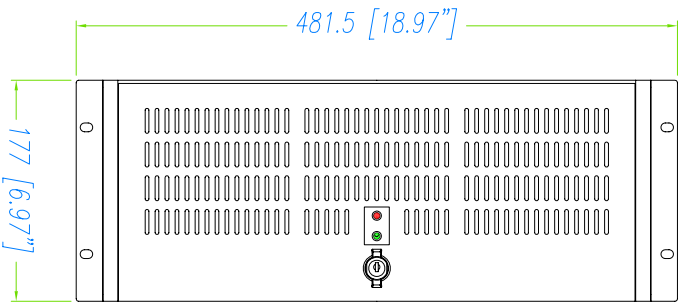

426.5 [16.8"]

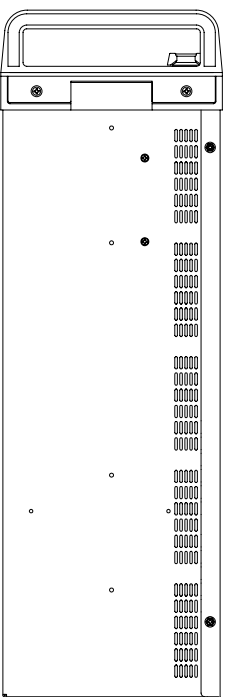

RM-418

PROPRIETARY NOTICE
This drawing contains proprietary information of CODAK INTERNATIONAL Co., Ltd. Any reproduction or disclosure of this drawing in whole or in part without a written consent from CODAK INTERNATIONAL Co., Ltd. is prohibited.
CUSTOMER APPROVAL

MATERIAL SECC
TOLERANCES UNLESS NOTED
DECIMAL .XX ±0.12
DECIMAL .X ±0.25
DECIMAL .X ±1
ANGULAR ±1

COMIX
PART NO. KX-401

PROJ	SCALE 1:3	TITLE DIA DRAWING	
APP	DO NOT SCALE DWG	MODEL	FILE NO
CHK		RM-418	RM-418-DIA
DGN		UNIT	REV.
DRW	08/07/23	mm	1
		SHT	1 OF 1
		SIZE	A3