




EC-315 : 12V/15A



EC-330 : 12V/30A

EC-340 : 24V/15A

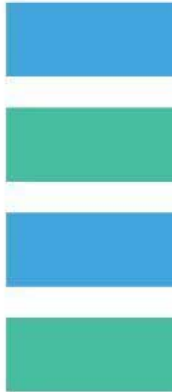

Technical Data:

Article-number	EC-315	EC-330	EC-340
Mains input voltage range	115V 230V	98-132VAC 207-253VAC	
Input frequency	50 ~ 60 Hz		
Output Voltage, Boost 1.2	14.4V or 14.8V or disable	14.4V or 14.8V or disable	28.8V or 29.6V or disable
Output Voltage, Float	13.8V	13.8V	27.6V
Output Amps	15A	30A	15A
Operating temperature range	0°C - 50° C		
Weight	115V 230V	2 kgs 2.35 kgs	2.75 kgs 3.1 kgs
Housing dimensions LxWxH	215 x 213 x 80 mm	273 x 213 x 80 mm	273 x 213x80 mm
Output Banks	3	3	3
Protection	1. Short circuit 2. Overload 3. Reverse Polarity Protection	1. Short circuit 2. Overload 3. Reverse polarity protection 4. Over temperature	1. Short circuit 2. Overload 3. Reverse polarity protection 4. Over temperature
Approval	230V CE	CE	CE

Features :

- 2 stages charging.
- External dip switch: Voltage selectable.
- No 'trickle charge' to boil off electrolyte.
- Designed for installation anywhere on board.
- Maintains batteries in perfect condition and prolongs their useful life.