


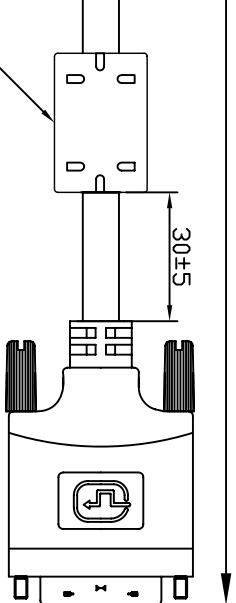

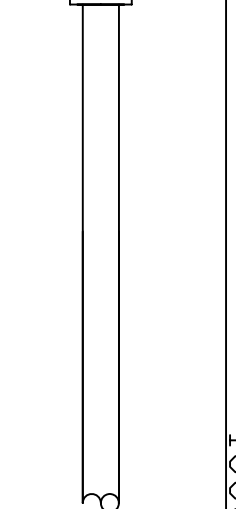





10000±50



"P1"



"P2"

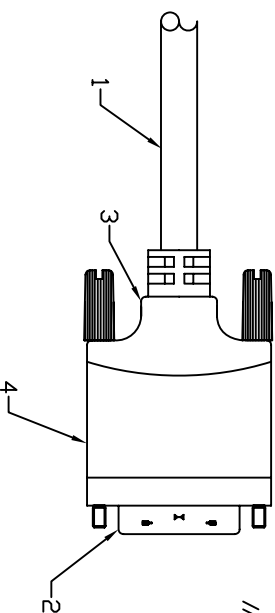

SHIELD	SHIELD 外	OUT SHIELD	GROUND
PIN24	橙	ORANGE	TMS CLOCK-
PIN23	白	WHITE	TMS CLOCK+
PIN22	編織	BRAID	TMS CLOCK SHIELD
PIN21	黑	BLACK	TMS DATA 5+
PIN20	白	WHITE	TMS DATA 5-
PIN19	編織	BRAID	TMS DATA 0/5 SHIELD
PIN18	黃	YELLOW	TMS DATA 0+
PIN17	白	WHITE	TMS DATA 0-
PIN16	編織	BRAID	LIGHT GREEN HOT PLUG DETECT
PIN15	黑	BLACK	GROUND(+5V & HV SYNC)
PIN14	紅	RED	POWER +5V
PIN13	棕	BROWN	TMS DATA 3+
PIN12	黃	YELLOW	TMS DATA 3-
PIN11	編織	BRAID	TMS DATA 1/3 SHIELD
PIN10	綠	GREEN	TMS DATA 1+
PIN9	白	WHITE	TMS DATA 1-
PIN7	編織	BRAID	LIGHT BLUE DDC DATA
PIN6	粉紅	PINK	DDC CLOCK
PIN5	黑	BLACK	TMS DATA 4+
PIN4	紅	RED	TMS DATA 4-
PIN3	編織	BRAID	TMS DATA 2/4 SHIELD
PIN2	藍	BLUE	TMS DATA 2+
PIN1	橙	ORANGE	TMS DATA 2-
DVI 24+1	DVI 24+1	COLOR	CABLE FUNCTION

5	CORE:28.5*ø16.0*ø9.5	PCS	1
4	Aluminum Alloy HODD<BLACK>	PCS	2
3	PVC MOLDED BLACK IN COLOR	PCS	
2	DVI24+1 MALE SHELL PLATED:GOLD CONTACT:G/F	PCS	2
1	UL20276 (1P*28AWG+D+AL/MYLAR)*7C+1P*28AWG+3C*28AWG+AL+B DD86 BLACK IN COLOR	PCS	1
No.	DESCRIPTION	UNIT	Q'TY
A	DVI CABLE 24+1 MALE TO 24+1 MALE		
REV.	DESCRIPTION		

ELECTRICAL TEST:

1. CURRENT RATING: DC 0.5A
2. WITHSTANDING VOLTAGE: DC 300VDC
3. INSULATION RESISTANCE: 5Mohm
4. CONDUCTIVE RESISTANCE:10ohm

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±0.5
SCALE:	NONE
DRAWN	Xing Fq
CHECKED	Eric
DATE	07/12/5
UNIT:	mm

COMIX

DATE	07/12/5	APPROVED	SIZE	A4	REV.	A	FILE NAME:	康熙-DVI-2525G-ABK-10-C
							DRAWN NAME:	
							PRODUCT NO.	