



ELECTRICAL TEST:

1. OPEN / SHORT 100% TEST.
2. CONTACT RESISTANCE : 2Ω(MAX).
3. INSULATION RESISTANCE : 20MΩ (MIN).
4. HI-POT : DC 300V / 10MS.

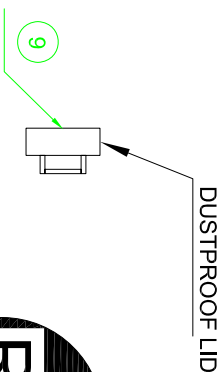

| | | | | |
|-----|------------------|---|-------|------|
| * | 4-18-0005-483015 | CARTON 46*30*15cm | 1/50 | PCS |
| * | 4-14-0004-302851 | PE BAG 30**28**0.08mm | 1/50 | PCS |
| * | 4-14-0001-060851 | PE BAG 6**8**0.06mm | 1 | PCS |
| * | 4-20-0020-000001 | RUBBER BAND | 2 | PCS |
| * | 4-14-0019-708051 | AIR BAG 70*80mm | 2 | PCS |
| * | 4-16-0003-100001 | TIE BLACK | 120*2 | mm |
| 10 | 4-20-0002-051051 | FOIL CU W=5mm | 60*2 | mm |
| 9 | 4-12-0003-010310 | COVER DUSTPROOF | 2 | PCS |
| 8 | 4-13-0028-254591 | OVAL HEAD SCREW M2.5*0.45 | 4 | PCS |
| 7 | 4-13-0027-254591 | THUMBSCREW M2.5*0.45 | 4 | PCS |
| 6 | 3-02-0002-086701 | TRL-THERMELT-867 | 8 | G |
| 5 | 2-67-0004-010351 | INFINIBAND TOP SHELL KIT (4x SCREW), ZINC ALLOY SHELL NICKEL PALTED | 2 | PCS |
| 4 | 2-67-0003-010351 | INFINIBAND TOP SHELL KIT (4x SCREW), ZINC ALLOY SHELL NICKEL PALTED | 2 | PCS |
| 3 | 2-67-0002-010351 | INFINIBAND BOTTOM SHELL KIT (4x SCREW), ZINC ALLOY SHELL NICKEL PALTED | 2 | PCS |
| 2 | 2-67-0001-004X51 | INFINIBAND 4x CONNECTOR | 2 | PCS |
| 1 | 1-67-0001-200201 | (28AWG*2P+FILLER+BINDE)+6P*28AWG(H+BINDER+AL+ML+BRAD)+JACKET BLACK(AFL) | 1000 | mm |
| NO. | PART NO. | DESCRIPTION | QTY | UNIT |

| | | |
|--------------------------------------|------------|----------|
| UNLESS OTHERWISE SPECIFIED TOLERANCE | ANG. | ±0.5 |
| SCALE: NONE | UNIT: mm | ±0.2 |
| DRAWN | Y/xkxoyang | 08/11/20 |
| CHECKED | eric | 08/11/20 |
| APPROVED | | |

COMIX

| | |
|-------------|-------------------|
| DRAWN NAME: | INFB-TS-TS-1M-28# |
| PRODUCT NO. | 6796002-B |
| FILE NAME: | |
| SIZE | A4 |
| REV. | A |