



- ELECTRICAL TEST:**
- 1.OPEN / SHORT 100% TEST.
 - 2.CONTACT RESISTANCE : 10Ω
 3. INSULATION RESISTANCE : 5MΩ
 - 4.HI-POT : DC 300V /10MS.



*	4-18-0005-463015	CARTON 46*30*15cm	1/25	PCS
*	4-14-0022-342851	PE BAG 34**28**0.08mm	1/25	PCS
*	4-14-0014-071006	PE BAG 7**10**0.06mm	1	PCS
*	4-16-0003-100001	TIE BK	80	mm
8	4-20-0063-001001	ACETATE TAPE W=10mm BK	35*2	mm
7	4-20-0052-002051	FIOL-CU W=20mm(V=20/2)	60*2	mm
6	4-13-0032-M26551	SCREW M2*0.65 NICKEL PLATED	4	PCS
5	3-02-0002-086701	TRL-THERMELT-867	10	G
4	2-70-0005-011551	EXT.MINI SAS 26P ZINE ALLOY BOTTOM SHELL NICKEL PLATED WITH LATCH	2	PCS
3	2-70-0002-011551	EXT.MINI SAS 26P ZINE ALLOY TOP SHELL NICKEL PLATED	2	PCS
2	2-70-0004-011551	EXT.MINI SAS 26P CONNECTOR (MINI SAS 4X)	2	PCS
1	1-67-0001-200201	[(28AWG*2P+FILLER+BINDE)+6P*28AWG+BINDER+AL.ML+BRAID+JACKET	1000	mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT

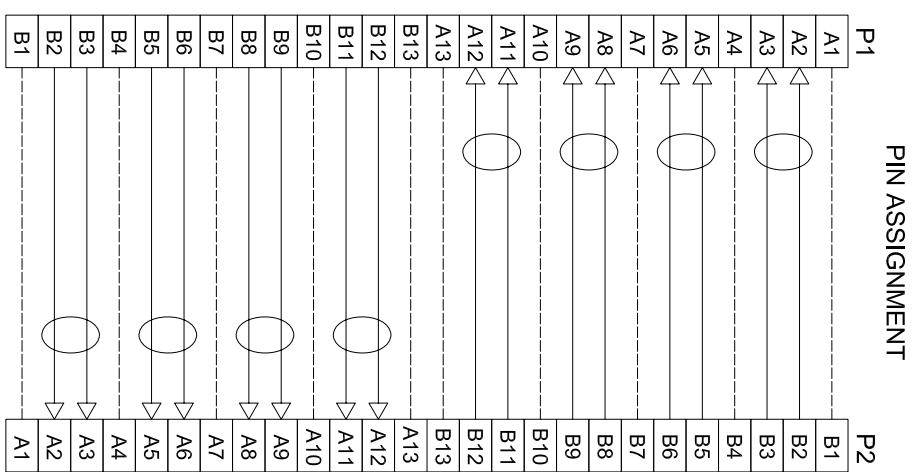

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG. 0.0

SCALE: NONE

DRAWN YixiaoYang 08/11/20

CHECKED ERIC XU 08/11/20

APPROVED / /

DATE 08/11/20

SIZE A4

REV. A

FILE NAME: PRODUCT NO.

COMIX

MS26-MS26-100