


ELECTRICAL TEST:
 1. OPEN / SHORT 100% TEST.
 2. CONTACT RESISTANCE : 10Ω.
 3. INSULATION RESISTANCE : 5MΩ.
 4. HI-POT : DC 300V / 10MS.



*	4-18-0005-463015	CARTON : 46*30*15cm	1/80	PCS
*	4-14-0022-342851	PE BAG : 34**28**0.08mm	1/80	PCS
*	4-14-0001-060851	PE BAG : 6**8**0.06mm	1	PCS
*	4-16-0003-100001	TIE BLACK	60*2	mm
*	4-20-0020-000001	RUBBER BAND	2	PCS
*	4-14-0019-708051	ARI BAG 70*80mm	2	PCS
11	4-20-0062-002001	ACETATE TAPE BLACK W=20mm	50*2	mm
10	4-13-0032-M26551	SCREW M2*0.65 NICKEL PLATED	2	PCS
9	4-12-0015-003651	LATCH MATERIAL: SUS #301	1	PCS
8	3-03-0002-005001	PP BK	4	G
7	3-02-0002-086701	TRL-THERMELT-867	5	G
6	3-02-0001-532151	PE321	1.5	G
5	2-70-0001-011501	INT. MINI SAS 36P PCB	1	PCS
4	2-70-0005-011551	EXT. MINI SAS 26P ZINC ALLOY BOTTOM SHELL NICKEL PLATED	1	PCS
3	2-70-0002-011551	EXT. MINI SAS 26P ZINC ALLOY UP SHELL NICKEL PLATED	1	PCS
2	2-70-0004-011551	EXT. MINI SAS 26P PCB	1	PCS
1	1-70-0002-200251	(30#*2C+2D)*8P+8C+FILLER (Amphenol No: 306-3699-970)	960	mm

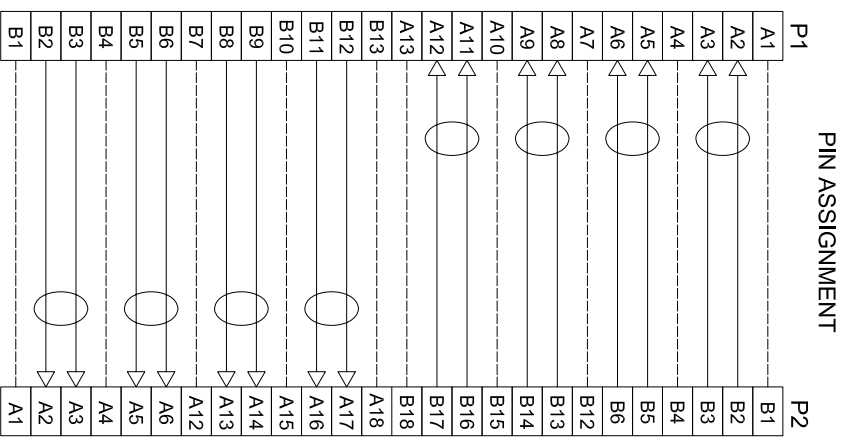

NO.	PART NO.	DESCRIPTION	QTY	UNIT
08/11/20				
DATE				
APPROVED				
SIZE A4				
REV. A				
FILE NAME:				
PRODUCT NO.				

COMIX

MS26-MS36-100

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG: E5
 0.0 ±0.5
 .00 ±0.2
 SCALE: NONE UNIT: mm

DRAWN: ylxiaoang
 CHECKED: ERIC XU
 08/11/20

DRAWN NAME:

MS26-MS36-100