


ST-308F IDE – CF Bridge (Front Mode)

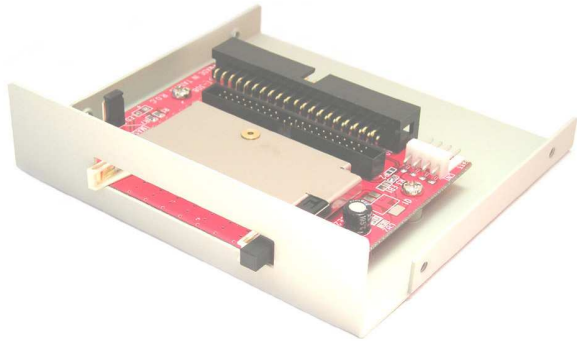

Convert IDE port (40Pin & 44Pin) to support bootable CF Card !

Connect This floppy bay to standard IDE 40Pin or 44Pin cable and make your PC system to support CompactFlash device.

This is a convenient 3.5" drive frame that allows CompactFlash modules to be used in any computer system that has a standard IDE 40 pin or 44 pin port.



FEATURES

- Supports 40 pin & 44 pin IDE standard Port both
- 3.5 " drive frame for 3.5" bay
- For any computer case , mini computer, embedded system, iPC and Rackmount case
- Support CompactFlash™ cards (Type I & II) or a IBM Microdrive™
- Transparent to the operating system and does not require any drivers
- The CF card can be the primary bootable device containing the OS and application
- Supports jumper for master and slave setting
- Push bottom ejector on board
- Powered from 4 pin floppy connector or 44 pin IDE Port

MODELS

- **ST308F-i:** Front Use Bridge Board with front Bay Bracket (floppy size, Ivory Color)
- **ST308F-b:** Front Use Bridge Board with front Bay Bracket (floppy size, Black Color)