

S-56™

5-Bay 3.5" SAS/SATA HDD Backplane Module in 3 x 5.25" Bay



The S-56™ allows up to 5 SATA or SAS drives to be installed into any three 5.25 inch device bays for a convenient data exchange. The backplane drive with the revolutionary anti-vibration design and ensure to highly protect the connection between hard drive & connector. The best feature is widely used from consumer-level to industrial-level because of the high stability and heat-dissipation.


Features

- ◆ Aluminum Construction Drives: With Aluminum body & inner tray
- ◆ With rugged anti-vibration level guiding rails to absorb all direction vibration
- ◆ Designed with High/Low adjustable cooling fan for Heat Dissipation and Excellent Air Flow
- ◆ With fan failure & overheating LED indication for easy service & maintenance
- ◆ With LED On/Off design to meet with the special type HDD
- ◆ Double security for the HDD Carrier metal key locking and the sliding panel for double security
- ◆ Applications : PCI RAID, Data Backup, Testing, A/V Editing, Drive Swapping

Specification


Model No.	S-56™
Form Factor	3 x 5.25" Bay for 5 x 3.5" HDD
Support HDD Type	3.5" SATA I, II, III & SAS I, II
Interface	7pin SATA signal connector x 5 & 15pin SATA power connector x 2
Indicators	Green for Power on/ Orange for HDD Access LED Indicating On/Off Switch Fan failure: LED indicates solid red Overheating: LED indicates sold red
Security	Metal Key Lock & Sliding Lock
Material	Aluminum
Cooling Fan	8 x 8cm fan x 1 and with High/Low Speed Switch
Compatibility	Windows / Linux / Mac
Dimension	205(L) * 126(W) * 146(H) mm
Weight	2.00kgs
Package	Universal Box ; Screw Bag ; Universal Carton ; W/O SATA Cable ; With Manual

Front Detail

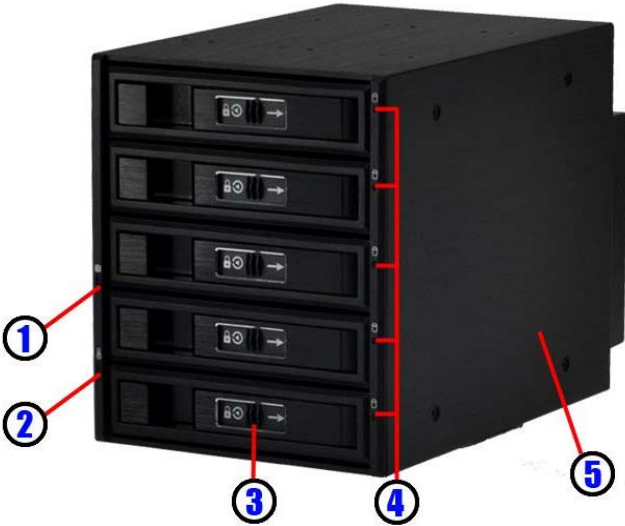

1. FAN status LED(Green : Normal & Red failed)
2. Temperature status LED(Green : Normal & Red failed)
3. Safety Lock with sliding panel. The safety lock safeguards the tray fixed
4. HDD LED , Power ON LED indicates Green. Orange blinking for HDD access
5. Aluminum Body

Back Detail

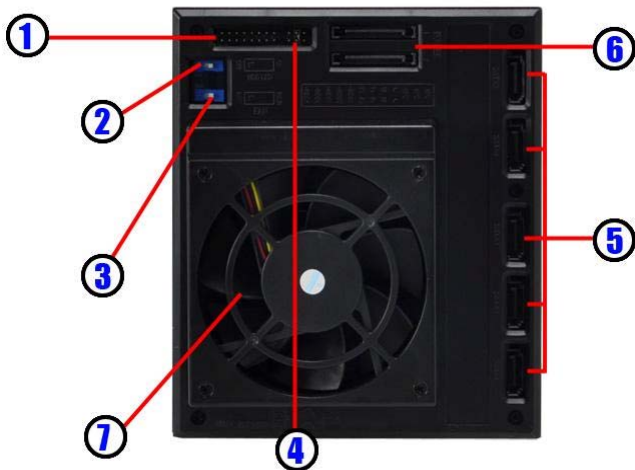

1. External Signal Pin Slot
2. HDD LED functioning ON/OFF switch
3. Switch for cooling fan High or Low speed
4. Temperature setting Pin Slot
5. 15pin Power connector
6. SATA 7Pin data signal connector for SATA or SAS primary channel connections
7. 8*8cm 3000RPM Cooling Fan