

# SS-86TM

8-Bay 2.5" SAS/SATA HDD Backplane Module in 2 x 5.25" Bay




The SS-86TM allows up to 8 SATA or SAS drives to be installed into any two 5.25 inch device bays for a convenient data exchange. Choice model for the multi-bay 2.5" HDD backplane. Simply rugged and high anti-vibration standard products and worry-free of the heat and vibration! Now an IPC industrial standard is also for soho and consumers.

## Features

- ◆ Multi-bay backplane for 2.5" HDD(SSD) data transferring solution
- ◆ Allow to install 8 x 2.5" SATA(SAS) hard drives or SSDs
- ◆ With 8 individual carrier for swapping in/out
- ◆ Support 2.5" SATA I,II,III, SAS I, II or SSD(height up to 12.7 mm)
- ◆ Support SATA and also SAS primary channel
- ◆ Easy drives swap in/out or for transportation
- ◆ Side sliding rails with vibration reducing springs
- ◆ With high performance cooling fan for quick and fast heat sink
- ◆ Individual LED for the 8 drives -- Blue for power on and purple blinking for accessing.
- ◆ With LEDD indication for fan failure and overheating
- ◆ With HDD accessing On/Off Control LED Switch
- ◆ With extending LED functioning jumper for external connection


## Specification

Model No.	SS-86TM
Form Factor	2 x 5.25" Bay for 8 x 2.5" HDD (SSD)
Support HDD Type	2.5" SSD SATA I / II / III & SAS I / II
Interface	7pin SATA signal connector x 8 & 15pin SATA power Connector x 2
Indicators	Blue for Power on / Purple for HDD Access LED Fan failure: Solid RED Overheating: Solid RED LED indicating On / Off switch
Security	Metal Key Lock for each HDD tray
Material	Aluminum
Cooling Fan	7 x 7cm fan x 1 with High / Low Speed Switch
Compatibility	Windows / Linux / Mac
Dimension	159(L) x 146(W) x 85(H) mm
Weight	1.3kg
Package	Universal Box ; Screw Bag ; Universal Carton ; <b>Without SATA Cable;</b> With Manual

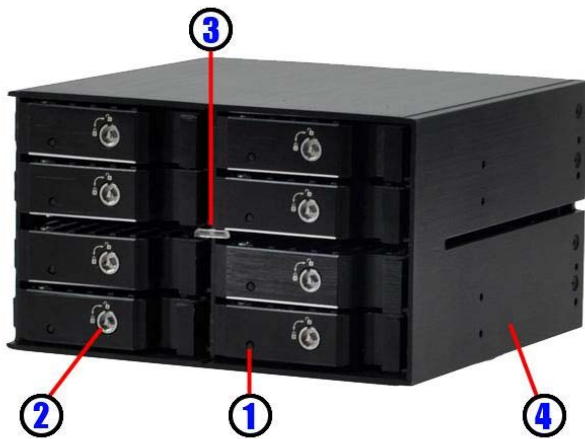

### Front Detail

1. HDD LED , Power ON LED indicates Blue  
Purple blinking for HDD access
2. Safety Lock.  
The safety lock safeguards the tray fixed
3. Temperature & FAN status LED solid Red for  
failure
4. Aluminum Body

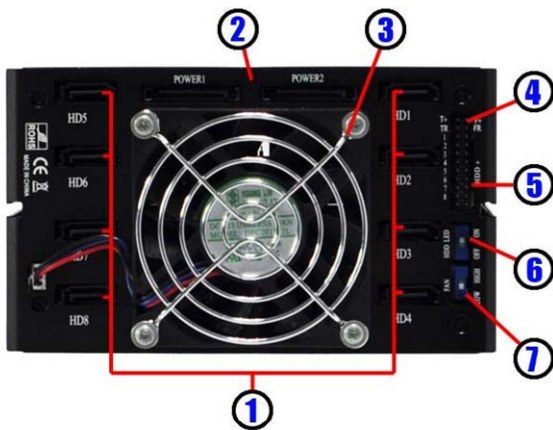

### Back Detail

1. SATA 7Pin data signal connector for SATA  
or SAS primary channel connections
2. 15pin Power connector
3. Cooling Fan(70 x 70 x15mm)
4. Temperature status & FAN status External Signal  
Pin Slot
5. HDD LED External Signal Pin Slot
6. Switch for cooling fan High or Low speed
7. HDD LED functioning ON/OFF switch