


ST-173-9 ■ Convert mSATA SSD as High Speed 9.5mm 2.5" IDE SSD Drive

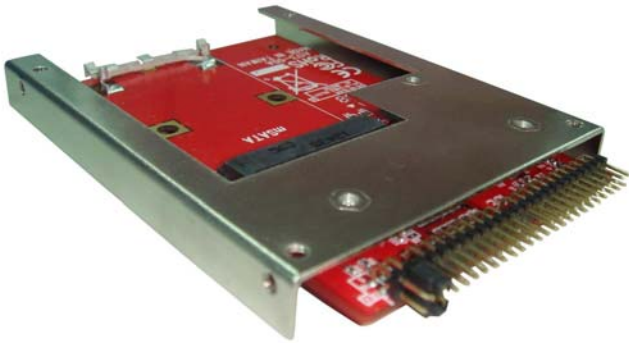

Best Solution that Easily Latch and Retain Fast Speed mSATA SSD as a normally standard 9.5mm 2.5 inch IDE SSD Drive with High Performance, No Noise, Low Power support!

FEATURES

- Convert Full Size mSATA SSD to High Performance, No Noise, Low Power 44Pin 2.5" IDE SSD
- Supports SATA I, SATA II and SATA III (6Gbps) mSATA SSD
- Latch type mSATA connector on board, no need the screw to retain mSATA SSD
- 100% Compatible with 2.5" IDE drive mechanical spec
- 48 bits LBA can Break Capacity-Limit to Support mSATA SSD max 144,115,188GB
- Compliant with Serial ATA 2.6
- Jumper setting support IDE Master, Slave and Cable Select Modes
- Tag Command Queuing (Max 32 entries)
- ATA/ATAPI PIO mode data transfer
- ATA/ATAPI UDMA data transfer rate of 150, 133, 100, 66, 44, 33, 25, 16.7 MB/s
- ATA/ATAPI-7 Streaming feature set
- Transparent to the operating system and no driver required
- Supports any OS like Windows, Mac and Linux
- Includes 9.5mm height 2.5 " drive metal frame with 8 mounting holes and 4 HDD screws
- Dimension of PCBA with 2.5" frame : 98mm x 69.85mm x 9.5mm
- Fully RoHS compliant