


KINO-945GSE-R11

Mini-ITX SBC with Intel® Atom™ N270 1.6G, VGA/DVI/TV, Dual PCIe GbE, USB2.0, SATA and Audio

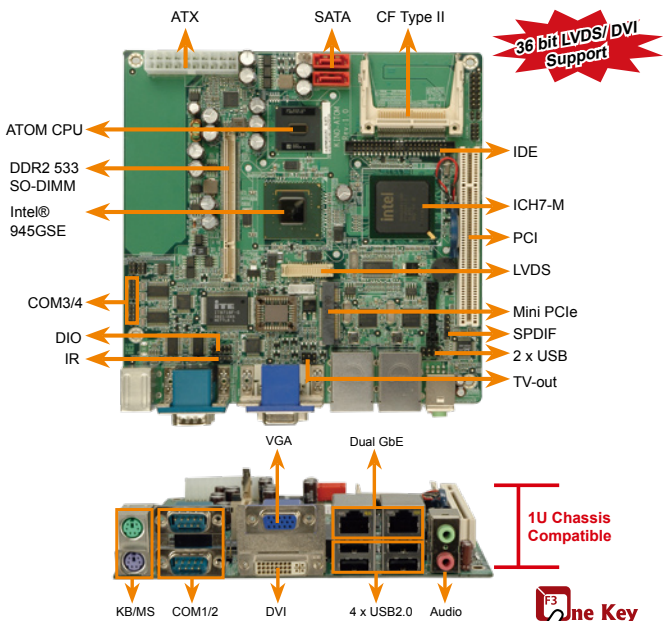

Features

1. Intel® Atom™ processor N270 1.6GHz with ultra low voltage fan-less support
2. DDR2 400/533 SO-DIMM memory support up to 2GB
3. Dual display support by VGA + DVI-D, LVDS + VGA, LVDS + DVI-D
4. Support PCIe Mini card, PCI slot for expansion
5. Support six USB 2.0, two SATA, four COM
6. One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU
Intel® Atom™ processor N270 1.6GHz with a 533MHz FSB
- ◆ System Chipset
Intel® 945GSE + ICH7M
- ◆ BIOS
AMI BIOS
- ◆ Memory
One 200-pin 400/533 DDR2 SDRAM SO-DIMM supported (system max. 2GB)
- ◆ Ethernet
Dual Realtek PCIe 8111CP GbE chipsets
- ◆ I/O Interface
6 x USB2.0 2 x SATA
1 x CF Type II 3 x RS-232
1 x RS-232/422/485 1 x IDE
2 x PS/2 for KB/MS
- ◆ Graphic
Intel® Graphics Media Accelerator 950
- ◆ Display Output
VGA integrated in Intel® 945GSE
Support HDTV resolution up to 1080i by component interface
18 bit dual channel LVDS by Intel® 945GSE
DVI-D support by silcon image Sil1362
- ◆ Expansion
1 x PCI, 1 x PCIe Mini card
- ◆ Digital I/O
8-bit digital I/O, 4-bit input/ 4-bit output
- ◆ Infrared Interface by pin header
- ◆ Super IO
ITE IT8718F
- ◆ Audio
Realtek ALC655 AC'97 codec
- ◆ Watchdog Timer
Software programmable support 1~255 sec. system reset
- ◆ Power Supply
AT/ATX power support
- ◆ Power Consumption:
2.89A@5V, 0.04A@12V
(Intel® Atom™ N270 with 1GB DDR2)
- ◆ Temperature
KINO-945GSE-N270-R11:
Operation: 0°C ~ 60°C (32°F ~ 140°F)
Storage: -20°C ~ 70°C
KINO-945GSE-N270W-R11:
Operation: -20°C ~ 70°C
- ◆ Humidity
Operation: 5% ~95% non-condensing
- ◆ Dimensions
170mm x 170mm
- ◆ Weight
GW: 1100g / NW: 370 g

Packing List

1 x KINO-945GSE single board computer	
1 x Dual RS-232 cable (P/N: 19800-000112-RS)	
1 x I/O shielding (P/N: 45014-0008C0-00-RS)	
2 x SATA cable (P/N: 32000-062800-RS)	1 x Mini jumper pack
1 x Utility CD	1 x QIG

Ordering Information

Part No.	Description
KINO-945GSE-N270-R11	Mini-ITX SBC with Intel® Atom™ N270 1.6G, VGA/DVI/TV, Dual PCIe GbE, USB2.0, SATA and Audio
KINO-945GSE-N270W-R11	Mini-ITX SBC with Intel® Atom™ N270 1.6G, VGA/DVI/TV, Dual PCIe GbE, USB2.0, SATA and Audio, -20~70°C
CB-USB02-RS	Dual USB cable
HDTV-CABLESET-01	HDTV cable set with S-Video, composite and component interfaces
32102-000100-200-RS	SATA power cable
32200-000009-RS	44pin 2.5" IDE cable
32200-833600-RS	RS-422/485 cable