

# SPECIFICATION

**Model Name : R2A-550D1V2**

**Revision : 1.1**

**550W Redundant Power Supply for 2U (High Efficiency)**



---

# Contents

## 1. General Description

## 2. Input Characteristics

2.1. AC Input voltage and frequency

2.2. Input current and inrush current

2.3. Power Factor

## 3. Power Efficiency

## 4. Output Characteristics

4.1. Output Voltage & Current Regulation

4.2. DC Output Ripple & Noise

4.3. Hold Up Time

4.4. Rise Time

4.5. Dynamic load response time

4.6. Remote on/off control

## 5. Power good signal

## 6. PROTECTION

6.1. Over voltage protection

6.2. Under-voltage protection

6.3. Over current Protection

6.4. Short circuit protection

6.5. Thermal Protection

## 7. Power System Signal status

7.1. Buzzer status

7.2. LED indicators

7.3. TTL signal

## 8. Load sharing

---

## **9. Isolation**

9.1. Insulation Resistance

9.2. Dielectric Withstand Voltage

9.3. Leakage current

## **10. Safety Requirements**

## **11. EMC**

11.1. EMI

11.2. EMS

## **12. Environmental**

12.1. Temperature

12.2. Humidity

12.3. Altitude

12.4. Vibration

12.5. Shock

12.6. Cooling Method

## **13. Reliability**

13.1 MTBF Qualification

## **14. Mechanical 2D Drawing and Power Connector**

14.1. Outside Dimension

14.2. DC Output cables

---

## 1. General Description

This specification describes the performance characteristics of a 550 watts hot swappable, 1+1 power system with +3.3V,+5V,+12V, -12V main DC outputs, and 5V standby outputs. The system is configured to hold two identical 550W power supply modules, Model R2A-550D1V2.

## 2. Input Characteristics

### 2.1. AC Input voltage and frequency

Minimum	Nominal	Maximum	Unit
90	100~240	264	VAC
47	50~60	63	Hz

### 2.2. Input current and inrush current

AC Input Voltage	MAX. Input Current per power supply module	Inrush Current per power supply module
115Vac	10A	25A
230Vac	5A	50A

### 2.3. Power Factor

90Vac	115Vac	230Vac	264Vac
> 0.99	> 0.98	> 0.95	> 0.92

## 3. Power Efficiency

The Minimum efficiency of the power supply is 80% at full load and 115Vac/60HZ input.

---

## 4. Output Characteristics

### 4.1. Output Voltage & Current Regulation

Output Voltage	Min. Current	Rated current	REGULATION
+3.3V	1A	25A	±5%
+5V	1A	25A	±5%
+12V	1A	45A	±5%
-12V	0A	1A	±5%
+5VSB	0.5A	3.5A	±5%

Note: The combined total power from 5V & 3.3V shall not exceed 180W.

### 4.2. DC Output Ripple & Noise

Output Voltage	Ripple & Noise (Max.)
+3.3V	60mVp-p
+5V	60mVp-p
+12V	120mVp-p
-12V	120mVp-p
+5VSB	50mVp-p

**Note:**

1. Ripple & Noise bandwidth is set to 20MHz.
2. Use a 0.1uF ceramic capacitor in parallel with a 10uF electrolytic capacitor at output connector terminals for ripple & noise measurements.

### 4.3. Hold Up Time

Output Voltage	115VAC Input	230VAC Input
+3.3V	> 16ms	> 16ms
+5V	> 16ms	> 16ms
+12V	> 16ms	> 16ms
-12V	> 16ms	> 16ms
+5VSB	> 16ms	> 16ms

Note: All of dc output at full load.

#### 4.4. Rise Time

Output Voltage	115/230Vac Input & Full Load
+3.3V	20ms (max.)
+5V	20ms (max.)
+12V	20ms (max.)
-12V	20ms (max.)
+5VSB	20ms (max.)

Note: The rise time measured is when the output voltages rise from 10% to 90% of specified output voltage  $V_{out}$  observed on the channel waveform.

#### 4.5. Dynamic load response time

The following shall apply to the 3.3 V, 5 V, and 12 V outputs:

Output voltage for each output shall recover to within 5 % of its steady state level in less than 1 ms under the following conditions:

AC Input Voltage: 90VAC ~ 264VAC			
Repetition rate of 100Hz with 50 % duty cycle			
Output	Step Load Size	Load Slew Rate	Capacitive Load
+3.3V	30% to 100% to 30% load	0.5 A/u sec	6000uF
+5V	30% to 100% to 30% load	0.5 A/u sec	6000uF
+12V	60% to 100% to 60% load	1 A/u sec	6000uf
+5SB	0% to 100% to 0% load	0.5 A/u sec	350uF

#### 4.6. Remote on/off control

The main outputs of this power supply (3.3V,5V,12V,-12V) shall be energized when input signal \*PSON is active. \*PSON is an active low TTL compatible signal referenced to the +5V standby common. This input signal shall be an open collector signal capable of sinking a minimum of 1.6mA. When \*PSON becomes inactive, the main outputs shall be disabled.

	PSU on	PSU off
PSON Signal	LOW (0.8V max)	HI (2V max)

---

## 5. Power good signal

The system shall have an active high TTL compatible signal capable of sinking 1mA and sourcing 100uA. The signal shall become active within 100 to 500 ms from the instant +5V output reaches a steady state level within the specified regulation limits. It shall become inactive at least 1 ms before +5V drops to below the lower regulation limit.

Power good @ 115/230VAC , Full Load	200ms ~ 500ms
Power Fail @ 115/230VAC , Full Load	1ms (Min.)

## 6. Protection

### 6.1. Over voltage protection

Output	Min	Max	Comments
+3.3V	3.75V	4.3V	PSU shutdown
+5V	5.7V	6.9V	PSU shutdown
+12V	13V	14.3V	PSU shutdown

Note : The power supply shall be test at max AC voltage (230Vac) and min load or no load.

### 6.2. Under-voltage protection

Output	Min	Max	Comments
+3.3V	2.0V	2.4V	PSU shutdown
+5V	3.3V	3.7V	PSU shutdown
+12V	8.5V	9.5V	PSU shutdown

Note : The power supply shall be test at max AC voltage (230Vac) and min load or no load.

### 6.3. Over current protection

Output	Over Current(Type)	Over Current(Max.)	Comments
+3.3V	$\geq 27.5A$	37.5A	PSU shutdown
+5V	$\geq 27.5A$	37.5A	PSU shutdown
+12V	$\geq 49.5A$	67.5A	PSU shutdown

Note : The over current protection should be tested at other load rating.

#### 6.4. Short circuit protection

Output	Comments
+3.3V	PSU shutdown
+5V	PSU shutdown
+12V	PSU shutdown

Note : The Short circuit protection should be tested at other load rating.

#### 6.5. Thermal Protection

The power supply shall go into thermal protection as the case temperature exceeds  $86^{\circ}\text{C} (\pm 5^{\circ}\text{C})$  limit.

The output shall recover only when the temperature becomes normal and AC power is turned on again.

### 7. Power System Signal status

#### 7.1. Buzzer status

Power Supply Condition	Buzzer status
No AC power to all PSU	OFF
AC present/Only Standby Output On	OFF
Power supply DC outputs ON and OK	OFF
Power supply failure	Beeping

#### 7.2. LED indicators

Power Supply Condition	Power system status		Per Power Module status
	RED	GREEN	ORANGE
No AC power to all PSU	OFF	OFF	OFF
AC present/Only Standby Output On	ON	OFF	OFF
Power supply DC outputs ON and OK	OFF	ON	ON
Power supply failure	OFF	Blinking	OFF



---

### 7.3. TTL signal

POWER SUPPLY CONDITION	OUTPUT CONDITION	
	Min.	Max.
NORMAL(POWER SUPPLY ON)	3V	5.25V
FAILURE(POWER SUPPLY OFF)	0V	1V

### 8. Load sharing

Output Voltage	Load Current	Load Share Voltage
+12V	1A	+0.48V ~ +0.52V
+5V	1A	+0.33V ~ +0.37V
+3.3V	1A	+0.33V ~ +0.37V

### 9. Isolation

#### 9.1. Insulation Resistance

Input To Output	500Vdc , 50M ohms Min.( at room Temperature)
Input To FG	500Vdc , 50M ohms Min.( at room Temperature)
Output To FG	Non Insulation

#### 9.2. Dielectric Withstand Voltage

Input To Output	1834Vac (30 mA) for 1 Minute.
Input To FG	1834Vac (30 mA) for 1 Minute.
Output To FG	Non Insulation

#### 9.3. Leakage current

3.5mA max. at 120~264Vac/50~60HZ.

### 10. Safety Requirements

- IEC 60950-1
- TUV EN 60950-1
- UL or cUL
- BSMI
- CCC

---

## 11. EMC

The power supply shall comply with the following criterion:

1) Conduction Emission:

A.EN55022:2006/A1:2007 CLASS A; EN55024:1998/A1:2001/A2:20003.

B.CISPR PUB.22 and FCC PART 15 SUBPART B CLASS A.

2) Radiated Emission :

A.EN55022:2006/A1:2007 CLASS A; EN55024:1998/A1:2001/A2:20003.

B.CISPR PUB.22 and FCC PART 15 SUBPART B CLASS A.

## 12. Environmental

### 12.1. Temperature

Operating : 0°C to +40°C

Non Operating: -20°C to +70°C

### 12.2. Humidity

Operating : 5% to 95%, non-condensing

Non Operating: 20% to 90%,non-condensing

### 12.3. Altitude

Operating: sea level to 7,000 feet

Non-operating: sea level to 40,000 feet

### 12.4. Vibration

10-55Hz, 19.6m/s<sup>2</sup>(2G), 3minutes period, 60minutes each along X, Y and Z axis.

### 12.5. Shock

49m/s<sup>2</sup>(5G),11ms, once each X, Y and Z axis.

### 12.6. Cooling Method

BY BALL BEARING DC FAN.


## 13. Reliability

### 13.1 MTBF Qualification




Using MIL - HDBK -217F the calculated MTBF > 100,000 hours at 25°C

# 14. Mechanical 2D Drawing and Power Connector

## 14.1. Outside Dimension:265(D)x101(W)x84(H)mm

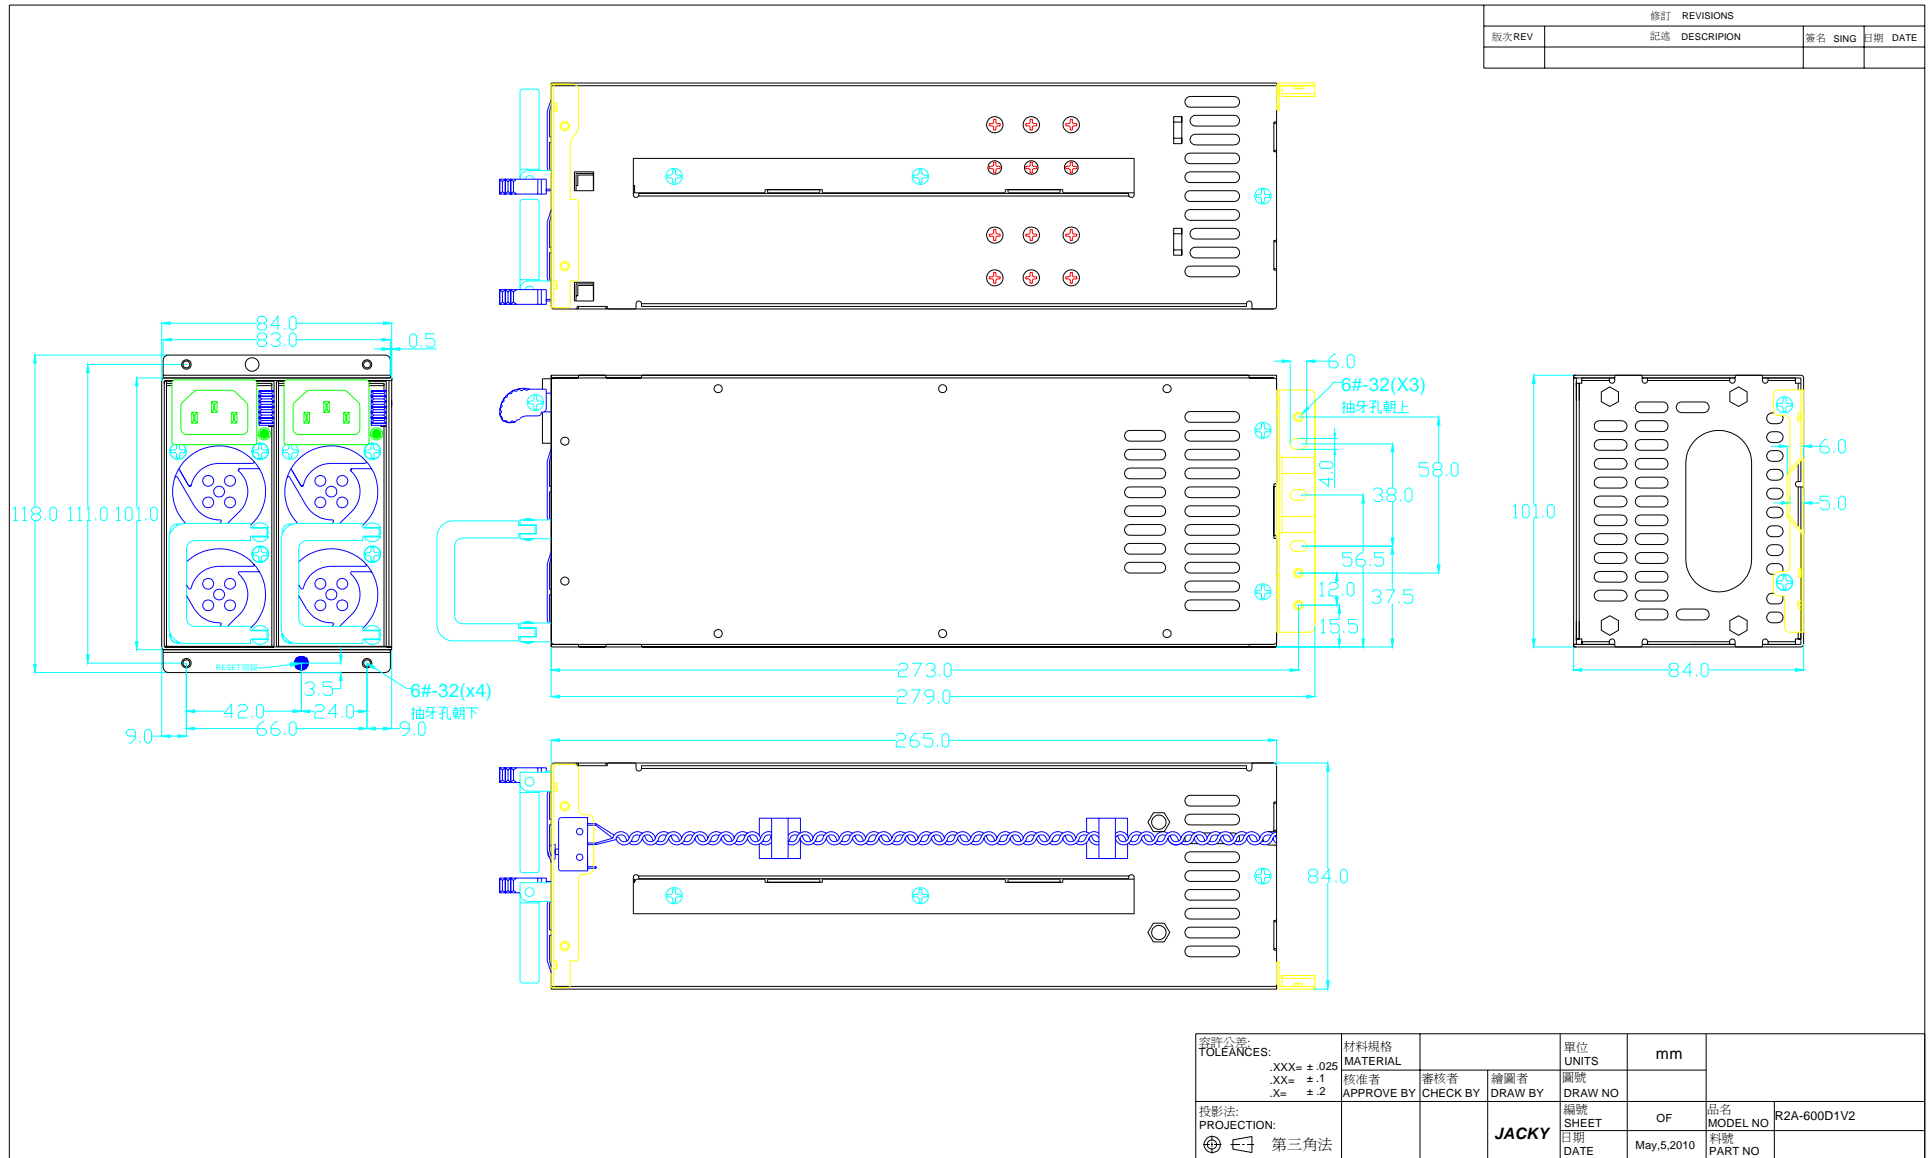

# 14.2. DC Output cables

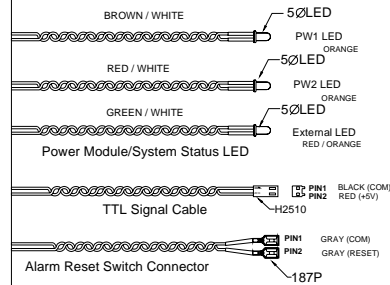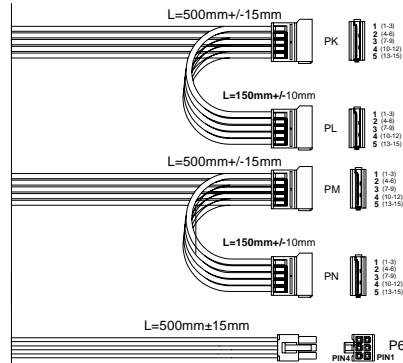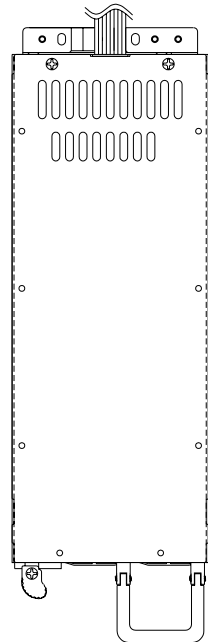

**6Pins**  
Connector HOUSING: MOLEX 39-01-0280 or equivalent  
TERMINAL: MOLEX 39-00-0060 or equivalent

Housing	Pin No.	WIRE COLOR	SIGNAL	WIRE TYPE	LENGTH
P6	1	YELLOW	+12V	18AWG	500mm ±15mm
	2	YELLOW	+12V	18AWG	
	3	YELLOW	+12V	18AWG	
	4	BLACK	COM	18AWG	
	5	BLACK	COM	18AWG	
	6	BLACK	COM	18AWG	

**POWER Module/System Status LED**


Name	WIRE COLOR	LED COLOR	WIRE TYPE	LENGTH
PW1LED	BROWN / WHITE	ORANGE	22AWG	900mm ±20mm
PW2LED	RED / WHITE	ORANGE	22AWG	
External LED	GREEN / WHITE	RED/ORANGE	22AWG	

**TTL Signal**  
Connector HOUSING: Molex 22-01-3027 or equivalent

Pin No.	WIRE COLOR	SIGNAL	WIRE TYPE	LENGTH
1	BLACK	COM	22AWG	900mm ±20mm
2	RED	+5V	22AWG	

**ALARM Reset Switch Connector**

Pin No.	WIRE COLOR	SIGNAL	WIRE TYPE	LENGTH
1	GRAY	COM	22AWG	900mm ±20mm
2	GRAY	REST	22AWG	

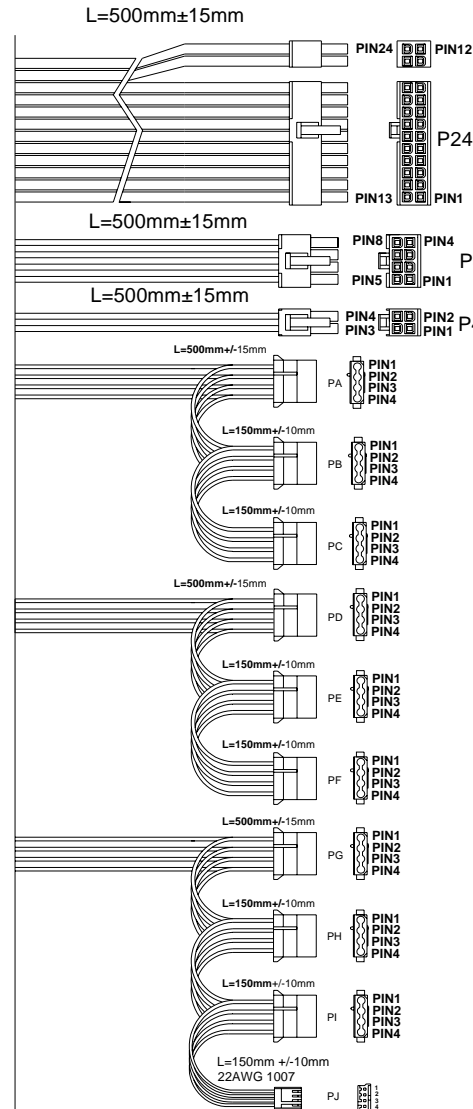

REVISIONS			
REV	DESCRIPTION	SIGN	DATE
01			/ /

**24Pins(EPS12V)**  
Connector HOUSING: MOLEX 39-01-2240 or equivalent  
TERMINAL: MOLEX 39-00-0039 or equivalent

Housing	Pin No.	WIRE COLOR	LENGTH	Pin No.	WIRE COLOR	LENGTH
P24	1	ORANGE(+3.3V)	500mm±18AWG	13	ORANGE(+3.3V)	500mm±18AWG
	2	ORANGE(+3.3V)	500mm±18AWG	14	BLUE(+12V)	500mm±22AWG
	3	BLACK(GND)	500mm±18AWG	15	BLACK(GND)	500mm±18AWG
	4	RED(+5V)	500mm±18AWG	16	GREEN(PS-ON)	500mm±20AWG
	5	BLACK(GND)	500mm±18AWG	17	BLACK(GND)	500mm±18AWG
	6	RED(+5V)	500mm±18AWG	18	BLACK(GND)	500mm±18AWG
	7	BLACK(GND)	500mm±18AWG	19	BLACK(GND)	500mm±18AWG
	8	GRAY(PG)	500mm±20AWG	20	NC	
	9	PURPLE(+5VSB)	500mm±18AWG	21	RED(+5V)	500mm±18AWG
	10	YELLOW(+12V)	500mm±18AWG	22	RED(+5V)	500mm±18AWG
	11	YELLOW(+12V)	500mm±18AWG	23	RED(+5V)	500mm±18AWG
	12	ORANGE(+3.3V)	500mm±18AWG	24	BLACK(GND)	500mm±18AWG

**8Pins(EPS12V)**  
Connector HOUSING: MOLEX 39-01-0280 or equivalent  
TERMINAL: MOLEX 39-00-0060 or equivalent

Housing	Pin No.	WIRE COLOR	SIGNAL	WIRE TYPE	LENGTH
P8	1	BLACK	COM	18AWG	500mm ±15mm
	2	BLACK	COM	18AWG	
	3	BLACK	COM	18AWG	
	4	BLACK	COM	18AWG	
	5	YELLOW	+12V	18AWG	
	6	YELLOW	+12V	18AWG	
	7	YELLOW	+12V	18AWG	
	8	YELLOW	+12V	18AWG	

**4Pins(ATX12V FOR P4)**  
Connector HOUSING: MOLEX 39-01-0280 or equivalent  
TERMINAL: MOLEX 39-00-0060 or equivalent

Housing	Pin No.	WIRE COLOR	SIGNAL	WIRE TYPE	LENGTH
P4	1	BLACK	COM	18AWG	500mm ±15mm
	2	BLACK	COM	18AWG	
	3	YELLOW	+12V	18AWG	
	4	YELLOW	+12V	18AWG	

**4Pins(HDC-DC-ROM/RW)P4H1-P4H4**  
Connector HOUSING: AMP 480424-0 or equivalent  
TERMINAL: AMP 608194 or equivalent  
**4Pins(FLOPPY DISK)P4F**  
Connector HOUSING: AMP 171822-4 or equivalent  
TERMINAL: AMP 170262-2 or equivalent

Housing	Pin No.	WIRE COLOR	SIGNAL	WIRE SIZE	LENGTH
PA	1	YELLOW	+12V	18AWG	500mm ±15mm
	2	BLACK	COM	18AWG	
	3	BLACK	COM	18AWG	
	4	RED	+5V	18AWG	
PB	1	YELLOW	+12V	18AWG	150mm ±15mm
	2	BLACK	COM	18AWG	
PE	1	YELLOW	+12V	18AWG	150mm ±15mm
	2	BLACK	COM	18AWG	
PH	1	YELLOW	+12V	18AWG	150mm ±15mm
	2	BLACK	COM	18AWG	
PJ	1	YELLOW	+12V	22AWG	150mm ±15mm
	2	BLACK	COM	22AWG	

**S.A.T.A HDD**  
HOUSING: MOLEX 675820000 or equivalent  
TERMINAL: MOLEX 675810000 or equivalent

Housing	Pin No.	WIRE COLOR	SIGNAL	WIRE TYPE	LENGTH
PK	1	ORANGE	+3V3	18AWG	500mm ±15mm
	2	BLACK	COM	18AWG	
	3	RED	+5V	18AWG	
	4	BLACK	COM	18AWG	
	5	YELLOW	+12V	18AWG	

Housing	Pin No.	WIRE COLOR	SIGNAL	WIRE TYPE	LENGTH
PL	1	ORANGE	+3V3	18AWG	150mm ±15mm
	2	BLACK	COM	18AWG	
	3	RED	+5V	18AWG	
	4	BLACK	COM	18AWG	
	5	YELLOW	+12V	18AWG	